


## NetWaySP4B

### 4-port Hardened PoE Switch Board

Altronix NetWaySP4B PoE+ Switch board provides two (2) 1 Gb SFP (Fiber) ports and four (4) PoE+ (30W) or two (2) Hi-PoE (60W) ports. Cameras/edge devices may be located up to 100m from the unit. Embedded LINQ Technology allows you to monitor, control, and report power and diagnostics from anywhere.

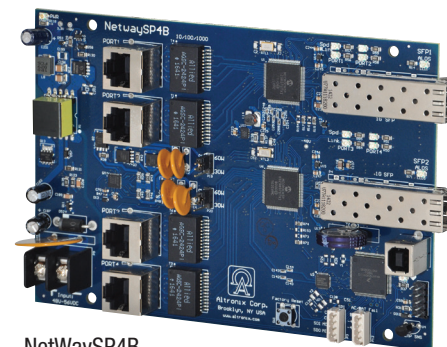

NetWaySP4B

### Key Features


- Two (2) Gigabit SFP ports
- 120W total power
- Four (4) PoE/PoE+ (up to 30W) ports or two (2) Hi-PoE (60W) ports
- Four (4) 10/100/1000 Mbps ports
- IEEE 802.3at (30W), IEEE 802.3af (15W) compliant, or Hi-PoE (60W)
- PoE activity LED indicators
- VLAN (Virtual Local Area Networks) subnetwork allows for the grouping together of devices for improved network traffic and higher security
- Mounting hardware included
- UL Listed in the U.S. and Canada
- CE European Conformity
- Lifetime Warranty

### Similar products

<b>NetWaySP4WPX</b>	Outdoor 4-port PoE+ Hardened Switch in NEMA 4/4X, IP66-11 enclosure which accommodates stand-by batteries
<b>NetWaySP4WP</b>	Outdoor 4-port PoE+ Hardened Switch in NEMA 4/4X, IP66-11 enclosure
<b>NetWaySP4WPN</b>	Outdoor 4-port PoE+ Hardened Switch only in NEMA 4/4X, IP66-11 enclosure
<b>NetWaySP4X</b>	Indoor 4-port PoE+ Hardened Switch in NEMA 1 Rated indoor enclosure
<b>NetWaySP4PL</b>	4-port PoE+ Hardened Switch with Integral Power on a Backplane

### Lifetime Warranty

### Typical Application

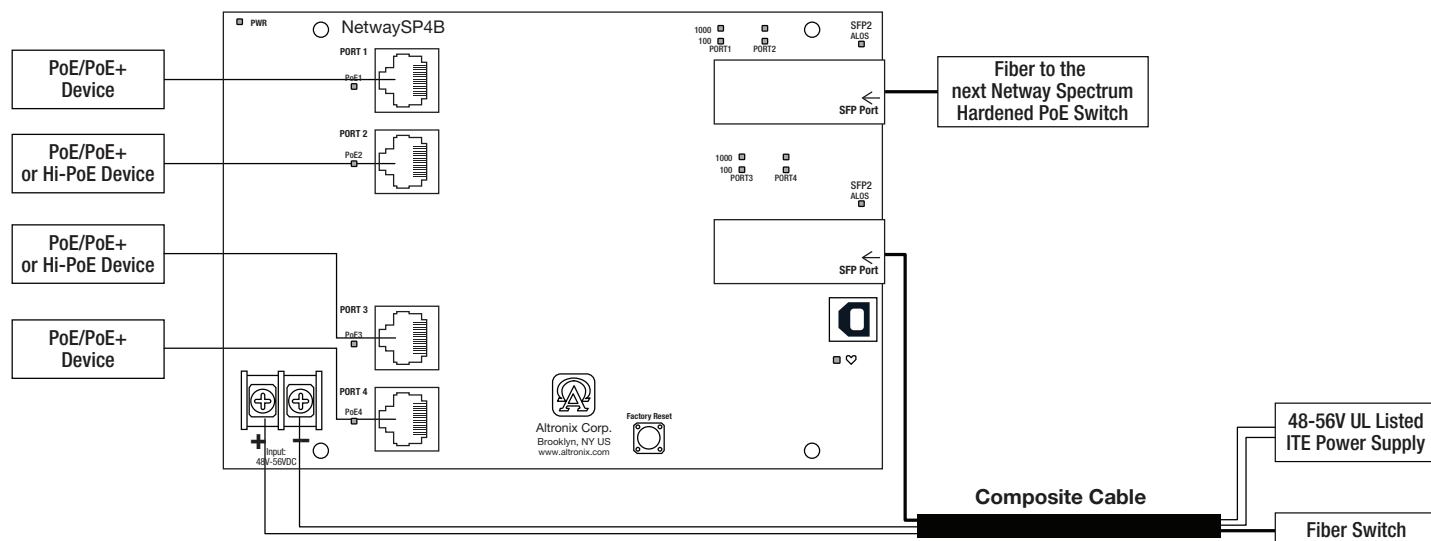

### Specifications

#### Input

Voltage 48V-56V (UL Listed ITE power supply)

#### Power Output

Maximum Power Four (4) PoE+ (30W) ports  
or two (2) Hi-PoE (60W) ports  
IEEE 802.3at (30W) and  
IEEE 802.3af (15W) compliant  
120W total power  
Integral surge protection

**Fiber Ports:** Two (2) Gigabit SFP ports

**Ethernet Ports:** Four (4) 10/100/1000 Mbps ports  
Connectivity: RJ45, auto-crossover  
Wire type: 4-pair CAT5 or better structured cable  
Distance: up to 100m  
Speed: 10/100/1000 Mbps,  
half/full duplex, auto negotiation

#### Indicators (LED)

Individual PoE On LEDs for each port  
Individual IP Link status, 10/100Base-T/active LEDs for each port  
ALOS LED indicates fiber connection for SFP port  
Heartbeat LED indicates proper operation of the unit

#### VLAN:

Multiple management VLAN assignment  
802.1Q Tagged VLAN  
Up to 10 VLAN groups. ID Range 2-4095

#### LINQ Technology:

Remote network management allows for camera/device reset and monitoring  
Provides local and/or remote access to critical information via LAN/WAN  
Email and Windows Dashboard Alert notifications report real-time diagnostics  
Event log tracks history.

#### Agency Listings

UL/cUL UL60950-1 (Information Technology Equipment)  
UL60950-22 (Information Technology Equipment to be installed Outdoors)  
CE European Conformity

#### Physical and Environmental

##### Dimensions (L x W x H)

Board: 6.5" x 4.5" x 0.625" (165.1mm x 114.3mm x 15.9mm)  
Shipping: 13" x 10" x 6" (330.2mm x 254mm x 152.4mm)

##### Weight (approx.)

Product: 0.4 lb. (0.18 kg)  
Shipping: 0.75 lb. (0.34 kg)

##### Temperature

**Operating:** 60W: -40°C to 75°C (-40°F to 167°F)  
75W: -40°C to 70°C (-40°F to 158°F)  
100W: -40°C to 55°C (-40°F to 131°F)  
120W: -40°C to 45°C (-40°F to 113°F)  
-40°C to 85°C (-40°F to 185°F)

##### Storage:

**Relative Humidity:** 85% +/- 5%  
**Operating Altitude:** -304.8 to 2,000m  
Mounting hardware included

### Lifetime Warranty

## NetWaySP4B

4-port Hardened PoE Switch Board



### Power Sourcing Equipment and Accessories (order separately)



4-port Ethernet over Fiber Media Converters for Applications Utilizing Composite or Conventional Cabling

**NetWaySP4** Unit passes a maximum power up to 120W per port (240W total power) from a Power Supply or Midspan Injector. Four (4) 1Gb SFP ports.

**NetWaySP4P** Unit provides a maximum power up to 120W per port (240W total power) from a built-in Power Supply/ Charger. Four (4) 1Gb SFP ports.

**NetWaySP4P2** Unit provides 56VDC power-limited 60W max. per port (240W total power) from a built-in Power Supply/Charger. Four (4) 1Gb SFP ports.



#### SFP Modules - Hot Pluggable Transceivers

**P1MM** Multi-Mode SFP Module for distances up to 550m

**P1SM10** Single-Mode SFP Module for distances up to 10km

**P1AB2K** Single Strand SFP Module for distances up to 2km

**P1GCE** Copper SFP Module for distances up to 100m



#### NetWaySP1A

Ethernet over Fiber Media Converter/Repeater for Applications Requiring an Additional SFP (Fiber) Port

NetWaySP1A PoE powered media converter/repeater converts 10/100/1000 Mbps to Fiber (1000Base-X/SX/LX).



#### PoE Power Supplies

##### POE60 - 75W Power Supply/Lithium Iron Phosphate Charger

Provides 75W for NetWay Spectrum switches.

It also features a built-in charger for Lithium Iron Phosphate batteries.

##### POE201 - 120W Power Supply/Charger

Provides 120W for NetWay Spectrum switches.

It also features a built-in charger for sealed lead acid or gel type batteries.

#### Lifetime Warranty

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA


phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: [info@altronix.com](mailto:info@altronix.com) | [www.altronix.com](http://www.altronix.com)

**Dimensions and Drawing**

Board Dimensions (L x W x H approximate)

6.5" x 4.5" x 0.625" (165.1mm x 114.3mm x 15.9mm)

Mounting Holes' Tolerance: +/- 0.04 in. (1mm)

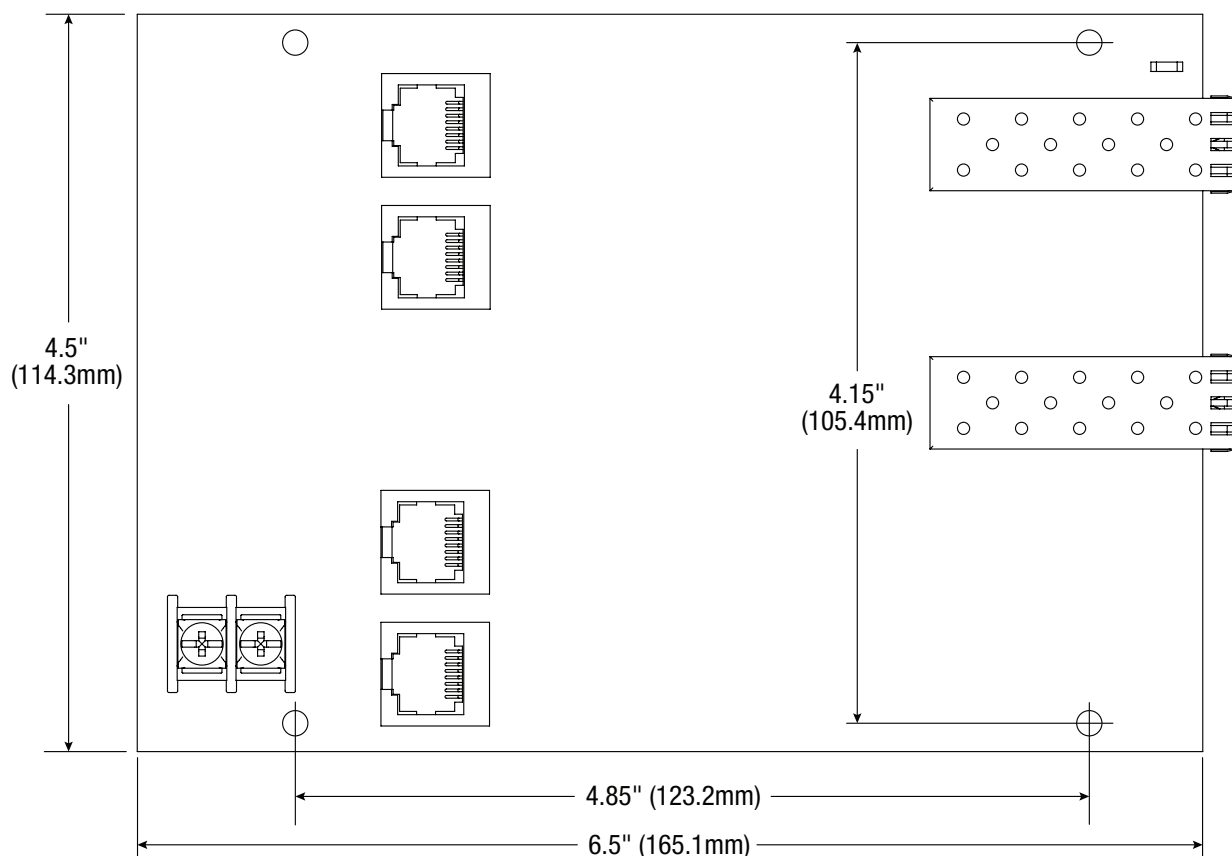**Lifetime Warranty**

Altronix Corporation | 140 58th St | Brooklyn, NY 11220 USA

phone: +1 718.567.8181 | fax: +1 718.567.9056 | email: [info@altronix.com](mailto:info@altronix.com) | [www.altronix.com](http://www.altronix.com)